

SOLID FLOOR



Solid floor is made of a single wooden element. It is also known as standard parquet as it has been the most popular of wooden flooring for generations. Its precise tongue and groove design enable perfect fitting and arranging. It blends modern with classical and it suits all types of rooms, in home, offices and hotels. Wooden floors impart character, warmth and elegance to any room.




TECHNICAL INFORMATION

ESSENCE	Oak
THICKNESS	20 mm
WIDTHS	100 - 120 - 140 - 160 - 180 - 200 mm
LENGTHS	500 - 2200 mm
SURFACE	Brushed or unbrushed
FINISHES	Oiled or unfinished
WEIGHT	1 m ² around 15 kg

PACKAGING

1 → 500 - 2200

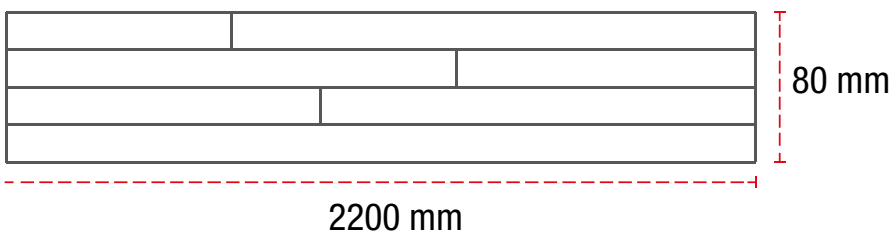

2 → 1800 - 2100

CLASS N1

Radial and tangent board permitted.
Permitted sound knots in color as wood up to 10 mm.
Sapwood not allowed.

Widths 100-120-140-160-180-200 mm

Thickness
20 mm

Lengths
500-2200 mm



CLASS N2

Permitted sound knots in color as wood up to 50 mm. Permitted few unsound knots up to 10 mm.
Sapwood permitted in trace (only on edges).

Widths 100-120-140-160-180-200 mm

Thickness
20 mm

Lengths
500-2200 mm



CLASS G

Sapwood permitted with sound knots up to 10 mm.

Widths 100-120-140-160-180-200 mm

Thickness
20 mm

Lengths
500-2200 mm



CLASS R

All the defects of the wood that can be filled are permitted.
Sapwood permitted on edges up to 20%.

Widths 100-120-140-160-180-200 mm

Thickness
20 mm

Lengths
500-2200 mm



CLASS RM

Wormwood holes and discoloration permitted.
All wood defect permitted.

Widths 100-120-140-160-180-200 mm

Thickness
20 mm

Lengths
500-2200 mm






The mark of responsible forestry

Recycled / prodotti certificati FSC®

Fkdesign

FLORIAN

     	      	
   	  	<p>www.florianinc.com</p>