




STAIR COMPONENTS




 **FLORIAN**

1 - NEWEL POST & SPINDLES


SECTION	LENGTH
90 x 90 mm	1500 mm - 1600 mm - 2100 mm 3000/3500 mm - 3600/3900 mm - 4000+ mm

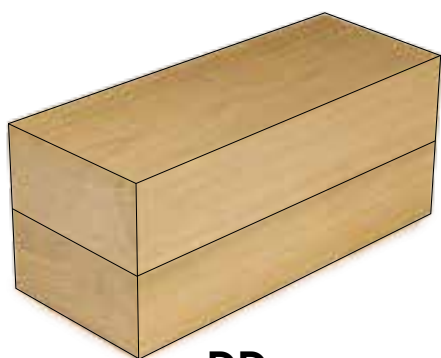


DD
45x2

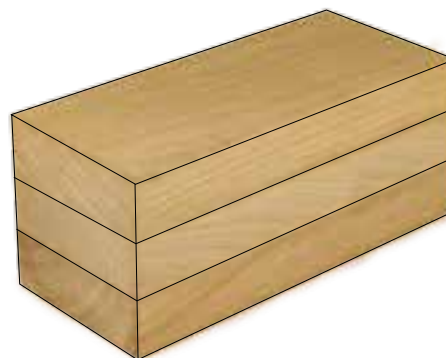

DDD
30x3

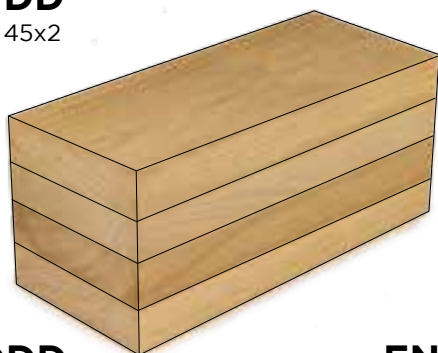

DDDD
22,5x4

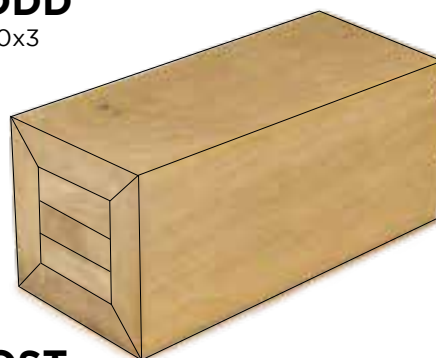


ENGINEERED POST


90x90
Finger jointed core.
Solid auters parts.

2 - EURO OAK HANDRAILS

SECTION	LENGTH
48 x 75 mm	3600+ mm
63 x 72 - 75 mm	
63 x 63 mm	

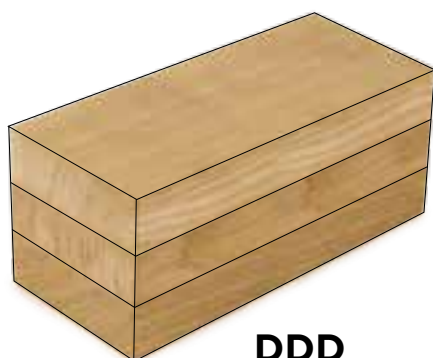

DDD
3 solid pieces

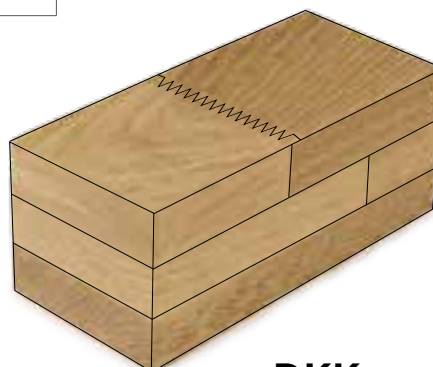

DKK
1 solid, 2 finger joint
200+ mm

3 - STRINGS & TREADS/RISERS


QUALITY



SOLID STAIR STRINGS

FEATURES
Essence Oak
Thickness 32/40 mm
Width 250 / 275 / 300 mm
Length Strings 3600 + mm (shorter lengths by falling)
QUALITY
Prime / Character


One solid piece.

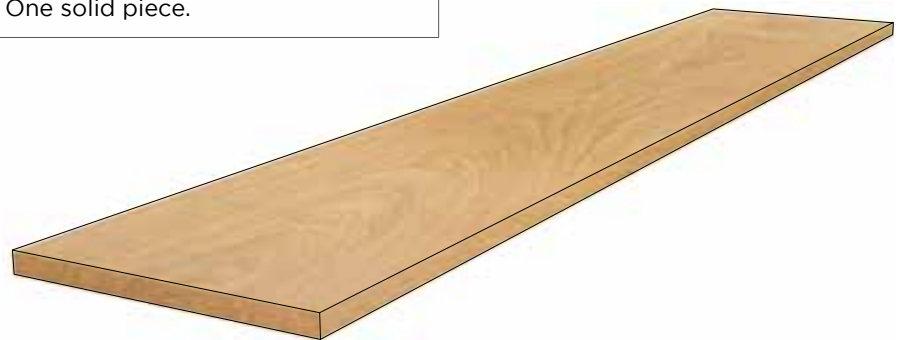

LAMINATED STAIR PANEL

FEATURES
Essence Oak
Thickness 32/40 mm
Width 250 / 275 mm
Length Strings 3600 + mm (shorter lengths by falling) Treads from 900 to 1200 mm
QUALITY
Prime / Character

Composed of three lamellas glued together.

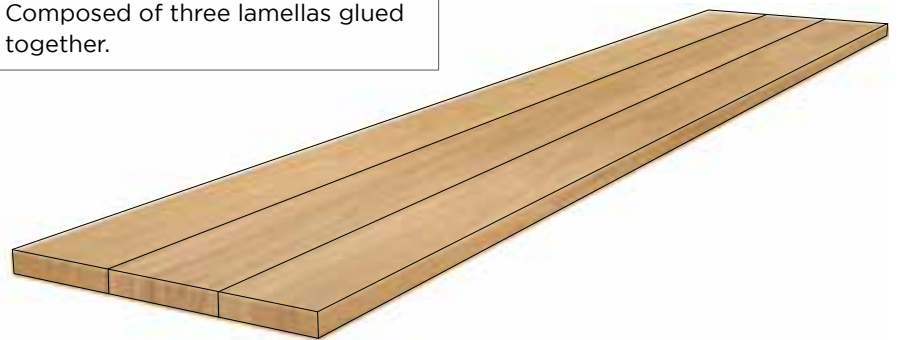

ENGINEERED STAIR PANEL

FEATURES
Essence Oak
Thickness 32/40 mm
Width 250 / 240 / 270 mm
Length Strings 3600 + mm (shorter lengths by falling) Treads from 900 to 1200 mm fixed
QUALITY
Wall application

Composed of three layers.
Core composed of comb jointed oak elements.
Outer layers made of oak strips.





     	      	
   	  	www.florianinc.com